

## How to.....Set or Change Swath Control Pro setting

1. Press **Menu** button



2. Press **GS2** or **GS3** button

3. Press **Swath Pro** button


4. Press **Settings** button

5. Verify or change these settings to suit your preferences either

a. Interior boundaries

b. Exterior boundaries

c. Coverage

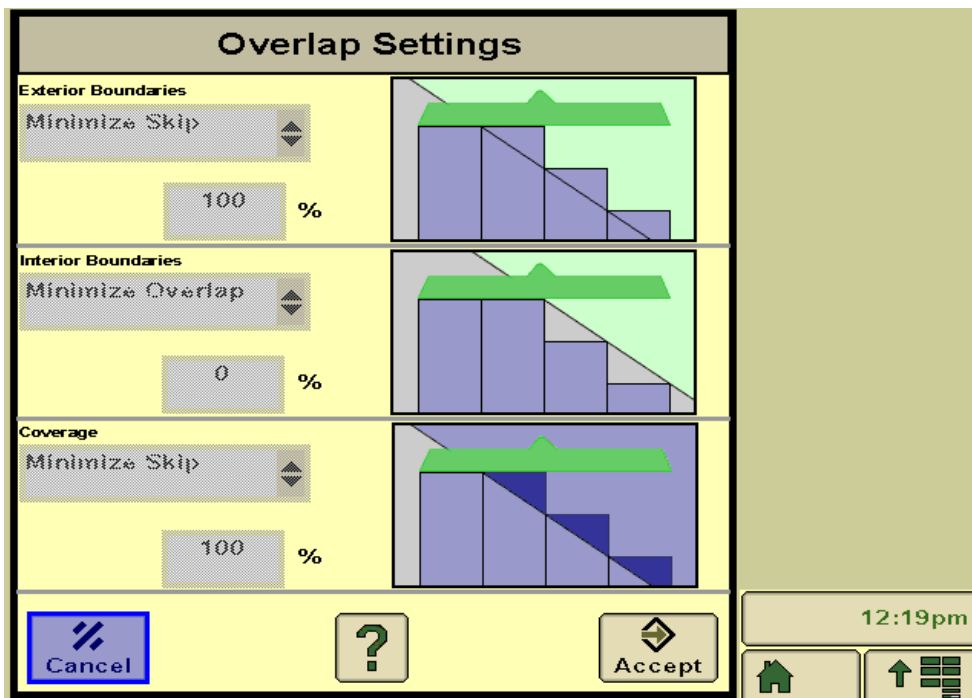

6. To change the turn on time touch the time listed below Turn On (sec),

The larger the number the earlier the sprayer or spreader will turn on to apply the product .

The smaller the number the later the implement will turn on to apply the product

A time of 5 seconds will turn the implement on 5 seconds before it is in the area that needs to be covered, *The range is from 0.3 seconds to 15 seconds.*

7. To change the turn off time simply touch the time listed below Turn Off (sec)


The larger the number the earlier the implement will disengage


The smaller the number the later the implement will disengage

A time of 5 will turn the implement off 5 seconds before it gets to the end of the area needing product

Need further advice? E-mail your enquiry to [chrisjacques@reavalleytractors.com](mailto:chrisjacques@reavalleytractors.com)

[www.reavalleytractors.com](http://www.reavalleytractors.com)

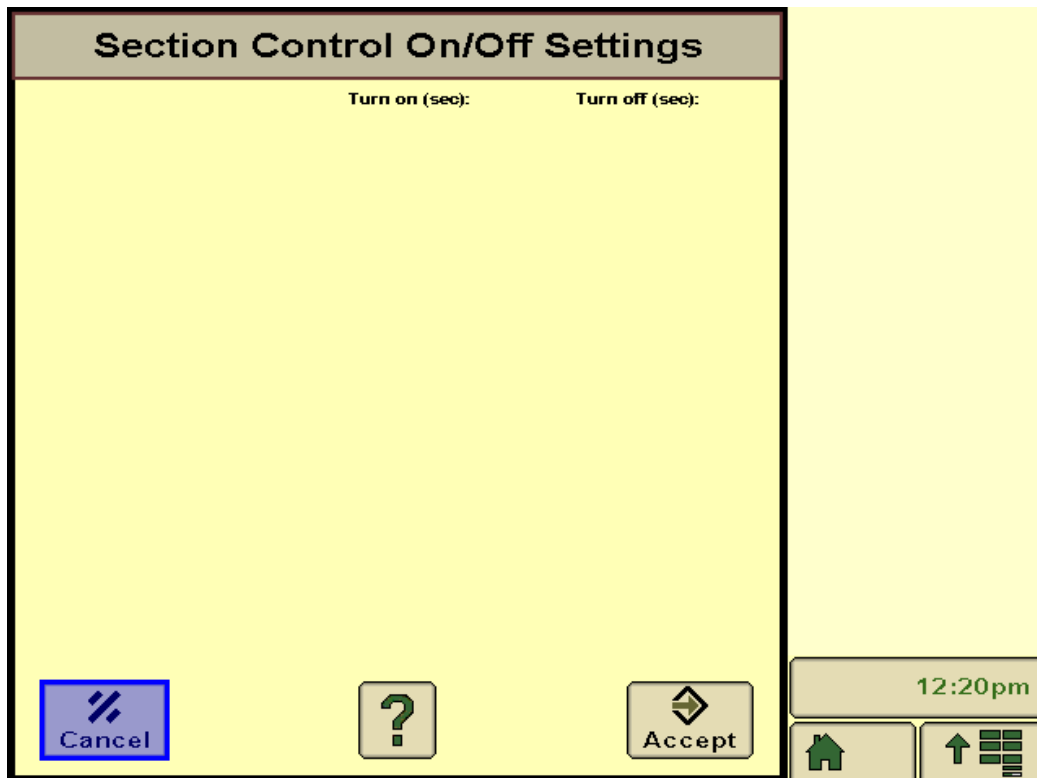

8. Press **Accept** button   
Press the **box** beside Swath Control, placing a check mark in it, to enable Swath Control
9. Press **home** button

*Starting point for sprayers and spreaders is turn on at 1 second and turn off at 0.5 seconds*